

LEDFIRE ALL-IN-ONE

Basic All-in-one Emergency Luminaire



ORDERING INFORMATION

Order code	10977
Description	Ledfire Basic Emergency Luminaire - Black - D40 - W/F&P
Driver Type	Fixed output
Item Code	EV-LEDFIRE-BASIC-B

MECHANICAL

Fitting Colour	Black
----------------	-------

ELECTRICAL

Input Frequency	50 Hz
-----------------	-------

Input voltage	230Vac
---------------	--------

In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%

DRIVER

Driver Type	Fixed output
Driver Included	Yes
Integrated Driver	Yes

EMERGENCY (EM SUFFIX)

Emergency Mode	Non-Maintained
Replacement Battery Code	01307
Emergency Duration	90 mins

COMPLIANCE


Product Design Life	6 years
The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.	
Standards	AS/NZS 60598.1
	AS 60598.2.22
	AS/NZS 61347.1
	AS/NZS 61347.2.13
	AS CISPR 15
	AS/NZS 2293.3

WARRANTY

Commercial Use Warranty	5 RTB (Total 5 Years)
-------------------------	-----------------------

LINE DRAWINGS

EV/LEDFIRE/BASIC

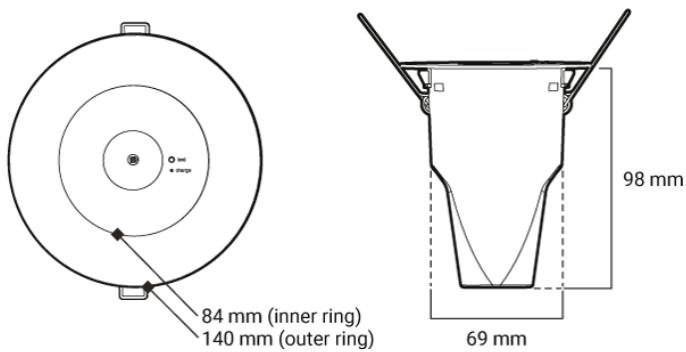

PHOTOMETRICS

EV/LEDFIRE/BASIC

