



24V POWER SUPPLIES | BOKE 30W, 60W, 100W, 150W | IP20

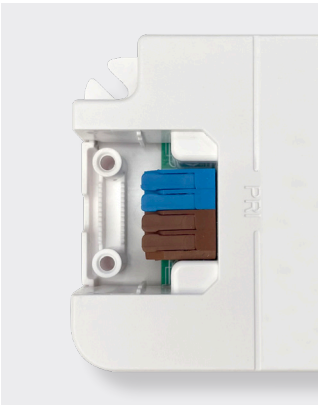

30W / 60W / 150W MODELS

CODE	OUTPUT WATTS	OUTPUT AMPS	POWER FACTOR	AC INRUSH CURRENT	DIMENSIONS
BK-PGV030-24V0	30W	1.25A	0.99	12.75A peak, 290us duration (50% Ipeak)	W50 × H16 × L155mm
BK-PGV060-24V0	60W	2.5A	0.99	19.2A peak, 360us duration (50% Ipeak)	W57.5 × H18 × L160mm
BK-PGV100-24V0	100W	4.2A	0.99	34.6A peak, 334us duration (50% Ipeak)	W63.2 × H22 × L185mm
BK-PGV150-24V0	150W	6.25A	0.99	31A peak, 334us duration (50% Ipeak)	W63.2 × H22 × L185mm

INPUT VOLTS	200–240V AC	WARRANTY	5 years	INGRESS PROTECTION	Indoor use only
OPERATING TEMP.	-25°C ~ +45°C	COMPLIANCE		HOUSING	Plastic
DISTANCE FROM INSTALLATION (Secondary Output)	Recommended under 10 metres			MOUNTING	Mounting tabs at each end
				ELECTRICAL PROTECTION	Short circuit, overload protection
				CONNECTION METHOD	30W / 60W / 150W Models Primary: Concealed snap lever terminals. 0.5–2.5mm TPS Secondary: Concealed screw terminals. 0.75–2.5mm TPS 100W Model Concealed screw terminals Input cable: 0.5–2.5mm TPS
				CONTROL	Dimmable on the secondary output only by PWM