




FOUNDATION SERIES GUIDE

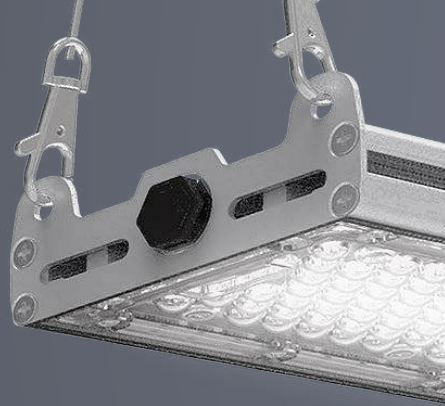

DOWNLIGHTS

● NEO	04
● ACE	06
● BARON	08

LED PANELS

● PRIME	10
● SELECT	12


CEILING BUTTON

● SOL	14
-------	----

BATTENS & WEATHERPROOF

● EZYFIX	16
● BOXY	18
● GRADUATE	20
● TYPHOON	22
● TRIDENT	24

CONTENTS

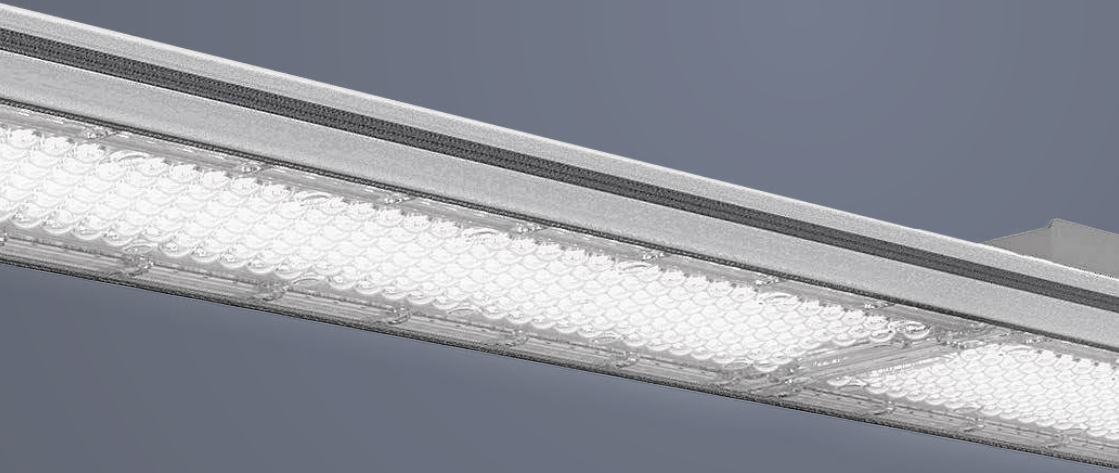

HIGHBAYS

● ASTRO 2.0	26
● SLATE	28

FLOODLIGHT

● STRIX	30
● CADET	32

EXTERIOR WALL LIGHTS

● SENTINEL TWIN SPOT	34
● WALL PACK	36
● GUARD	38



NEO

DOWNLIGHT SERIES



**TRIAC
DIMMING**



**CCT
SELECTABLE**



**FLICKER
FREE**



IP54



**5 YEAR
WARRANTY**

IC-F RATED

IC-F
ABUTTED &
COVERED



**BEZEL
OPTIONS**

for NEO90-8-9345



CRI90



SDCM <3

LIFETIME @L70 B50	>50,000hrs	POWER FACTOR	>0.9
LUMINAIRE EFFICACY	100lm/W	FLICKER	Flicker free (PstLM <1/SVM <0.4)
CCT	3000K/4000K/5000K	DIMMING	Triac
CRI	>90	CONNECTION	Junction Box with Screw Connectors
SDCM	<3 (3000K/5000K) <4 (4000K)	MATERIAL	Plastic coated Aluminium
UGR	<22	DRIVER TYPE	Non Isolated (not replaceable)
BEAM ANGLE	110°	IP RATING	IP54
MAINS VOLTAGE	200-240VAC / 50-60Hz	IK RATING	IK04

PRODUCT VARIANTS



WATTAGES	LUMEN OUTPUT
7W	630-700lm

DIMENSIONS

Ø85*H30
(cutout = Ø68-75)

NEO70-7-9345



WATTAGES	LUMEN OUTPUT
8W	720-850lm

DIMENSIONS

Ø110*H36
(cutout = Ø90-95)

NEO90-8-9345



WATTAGES	LUMEN OUTPUT
12W	1350-1480lm

DIMENSIONS

Ø145*H46
(cutout = Ø120-130)

NEO120-12-9345



WATTAGES	LUMEN OUTPUT
18W	1700-1970lm

DIMENSIONS

Ø170*H46
(cutout = Ø140-150)

NEO140-18-9345

BEZELS
ACCESSORIES

for NEO90-8-9345

TYPE	SUFFIX CODE
Black	NEO90-BK
Silver	NEO90-SL
Brushed	NEO90-BR



ACE

DOWNLIGHT SERIES

IC-F RATED

IC-F
ABUTTED &
COVERED

5

**5 YEAR
WARRANTY**



CRI90



UGR <19



**AVAILABLE IN
BLACK AND WHITE**



**CCT
SELECTABLE**



**TRIAC
DIMMING**



**FLICKER
FREE**



IP54



SDCM <3

LIFETIME @L70 B50 >50,000hrs

LUMINAIRE EFFICACY 105lm/W

CCT 3000K/4000K

CRI >90

SDCM <3

UGR <19

BEAM ANGLE 50°

MAINS VOLTAGE 200-240VAC / 50-60Hz

POWER FACTOR >0.95

FLICKER Flicker free (PstLM <1/SVM <0.4)

DIMMING Triac

DRIVER TYPE Isolated (replaceable)

CONNECTION Junction Box with Screw Connectors

MATERIAL Plastic coated Aluminium

IP RATING IP54 (from the front)

IK RATING IK04

PRODUCT VARIANTS

ACE FIXED

WATTAGES	LUMEN OUTPUT
8W	800-860lm
DIMENSIONS	Ø110*38 (cutout = Ø90)



WHITE: ACEF90-8-934-W | BLACK: ACEF90-8-934-B

ACE TILTABLE

WATTAGES	LUMEN OUTPUT
8W	800-860lm
DIMENSIONS	Ø110*40 (cutout = Ø90)




WHITE: ACET90-8-934-W | BLACK: ACET90-8-934-B

ACE SURFACE MOUNT

WATTAGES	LUMEN OUTPUT
8W	800-860lm
10W	960-1030lm
DIMENSIONS	Ø170*H46



WHITE: ACES90-8-934-W | BLACK: ACES90-8-934-B

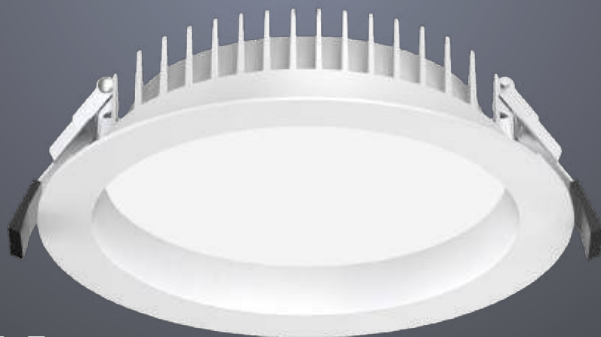

BARON

COMMERCIAL DOWNLIGHT SERIES

IC-F RATED



FLICKER FREE



**CCT
SELECTABLE**



CRI90



SDCM <3



**TRIAC
DIMMING**



**DEEP
CUTOFF**



IP54



**SURFACE
MOUNT OPTION**

LIFETIME @L70 B50 >50,000hrs

LUMINAIRE EFFICACY 105lm/W

CCT 3000K/4000K/5000K

CRI >90

SDCM <3 (3000K/5000K) <4 (4000K)

UGR <22

BEAM ANGLE 100°

MAINS VOLTAGE 200-240VAC / 50-60Hz

DALI-2 -DA

POWER FACTOR >0.95

FLICKER Flicker free (PstLM <1/SVM <0.4)

DIMMING Triac

CONNECTION Junction Box with Screw Connectors

MATERIAL Diecast Aluminium / PC

DRIVER TYPE Isolated (replaceable)

IP RATING IP54 (from the front)

IK RATING IK04

WARRANTY 5 years

PRODUCT VARIANTS

WATTAGES 18W

LUMEN OUTPUT 1770-2060lm

DIMENSIONS Ø145*53 (cutout = Ø120-130)

BARON120-18-9345

WATTAGES 25W

LUMEN OUTPUT 2500-3150lm

DIMENSIONS Ø190*53 (cutout = Ø160-170)

BARON160-25-9345

WATTAGES 35W

LUMEN OUTPUT 3920-4570lm

DIMENSIONS Ø228*53 (cutout = Ø200-210)

BARON200-35-9345

WATTAGES 40W

LUMEN OUTPUT 4570-4880lm

DIMENSIONS Ø280*53 (cutout = Ø230-260)

BARON230-40-9345

ACCESSORIES

SURFACE KITS

BARON145-SM (fits: BARON120-18-9345)

BARON190-SM (fits: BARON160-25-9345)

BARON228-SM (fits: BARON200-35-9345)

DIMENSIONS

Ø145*93

Ø190*93

Ø228*100



PRIME

PANEL



**DIMMING
OPTIONS**



SDCM <3



**FLICKER
FREE**



**>72,000hrs
LIFETIME**

IC-F RATED

IC-F
ABUTTED &
COVERED



**5 YEAR
WARRANTY**



UGR <19



120LM/W

LIFETIME @L70 B10 >72,000hrs

LUMINAIRE EFFICACY 120lm/W

CCT 4000K

CRI >80

SDCM <3

UGR <19

BEAM ANGLE 90°

MAINS VOLTAGE AC200-240V/50-60Hz

POWER FACTOR >0.95

THD <20%

FLICKER Flicker free (PstLM <1/SVM <0.4)

CONNECTION 1.2m flex and plug

IP RATING IP40

IK RATING IK04

PRODUCT VARIANTS

WATTAGES

LUMEN OUTPUT

42W

5,000lm

DIMENSIONS

1195mm x 595mm x 34mm

PRIME1260-42-840

WATTAGES

LUMEN OUTPUT

30W

3,600lm

DIMENSIONS

1195mm x 295mm x 28mm

PRIME1230-30-840

WATTAGES

LUMEN OUTPUT

30W

3,600lm

DIMENSIONS

595mm x 595mm x 28mm

PRIME6060-30-840

CONFIGURATIONS

TYPE

SUFFIX CODE

DALI-2

-DA

pushDim

-SD

Triac Dimming

-PC

Casambi Wireless

-CA

Emergency

-EM



SELECT

PANEL



UGR <19



120LM/W



**5 YEAR
WARRANTY**

IC-F RATED



**>72,000hrs
LIFETIME**



WATTAGE
Selectable



SDCM <3



CCT
Selectable



**FLICKER
FREE**

LIFETIME @L70 B10 >72,000hrs	MAINS VOLTAGE AC200-240V/50-60Hz
LUMINAIRE EFFICACY 120lm/W	POWER FACTOR >0.90
CCT (SELECTABLE) 3000K/4000K/5000K	DRIVER EFFICIENCY >92%
CRI >90	THD <15%
SDCM <3 (4000K) <5 (3000K/5000K)	FLICKER Flicker free (PstLM <1/SVM <0.4)
UGR <19	CONNECTION 1.2m flex and plug
BEAM ANGLE 90°	IP RATING IP40
	IK RATING IK04

PRODUCT VARIANTS

*Lumen output at 4000K CCT

WATTAGES	LUMEN OUTPUT*
30W	3,600lm
38W	4,560lm
42W (Set)	5,000lm
50W	6,000lm
DIMENSIONS	1195mm x 595mm x 34mm
SELECT1260-50-9345	

WATTAGES	LUMEN OUTPUT*
24W	2,880lm
26W	3,120lm
28W	3,360lm
30W (Set)	3,600lm
DIMENSIONS	1195mm x 295mm x 28mm
SELECT1230-30-9345	

WATTAGES	LUMEN OUTPUT*
24W	2,880lm
26W	3,120lm
28W	3,360lm
30W (Set)	3,600lm
DIMENSIONS	595mm x 595mm x 28mm
SELECT6060-30-9345	



SOL

CEILING BUTTON



**5 YEAR
WARRANTY**

**BLACK RING
ACCESSORY**



**>50,000hrs
LIFETIME**



IP54



CCT
Selectable



WATTAGE
Selectable

**MOTION
SENSOR**

Option



Up to
**2,000LM
OUTPUT**



100LM/W

LIFETIME @L70 B10 >50,000hrs

LUMINAIRE EFFICACY 100lm/W

CCT (SELECTABLE) 3000K/4000K

CRI >80

SDCM <5

BEAM ANGLE 132°

MAINS VOLTAGE AC220-240V/50-60Hz

POWER FACTOR >0.90

THD <20%

IP RATING IP54

IK RATING IK07

PRODUCT VARIANTS

*Lumen output at 4000K CCT

WATTAGES	LUMEN OUTPUT*
10W	1,000lm
20W	2,000lm
TYPE	Standard
DIMENSIONS	Ø290 x 58mm
SOL290-20-834	

WATTAGES	LUMEN OUTPUT*
10W	1,000lm
20W	2,000lm
TYPE	Includes microwave sensor
DIMENSIONS	Ø290 x 58mm
SOL290-20-834-SNR	

ACCESSORIES

BLACK RING
SOL290-BR-B



INTERNAL VIEW





EZYFIX

BATTEN



>50,000hrs
Lifetime



5 YEAR
WARRANTY



Up to
8,000LM
OUTPUT



WATTAGE
Selectable



FLICKER
FREE



TRIDONIC
DRIVER



160LM/W



CCT
Selectable



EMERGENCY
OPTION

LIFETIME @L70 B10 >50,000hrs	DRIVER BRAND Tridonic
LUMINAIRE EFFICACY 160lm/W	MAINS VOLTAGE AC220-240V/50-60Hz
CCT (SELECTABLE) 3000K/4000K/5000K	POWER FACTOR >0.95
CRI >80	THD <10%
SDCM <4	FLICKER Flicker free (PstLM <1/SVM <0.4)
BEAM ANGLE 120°	IP RATING IP20
	IK RATING IK08


PRODUCT VARIANTS

*Lumen output at 4000K CCT

WATTAGES	LUMEN OUTPUT*	WATTAGES	LUMEN OUTPUT*
28W	4,480lm	22W	3,520lm
35W	5,600lm	28W	4,480lm
42W (Set)	6,720lm	34W (Set)	5,480lm
50W	8,000lm	40W	6,400lm
DIMENSIONS	1503mm x 66mm x 64mm	DIMENSIONS	1203mm x 66mm x 64mm
EZY1500-50-8346		EZY1200-40-8346	

CONFIGURATIONS

TYPE	SUFFIX CODE
DALI-2	-DA
SwitchDim	-SD
Triac Dimming	-PC
Casambi Wireless	-CA
Emergency	-EM

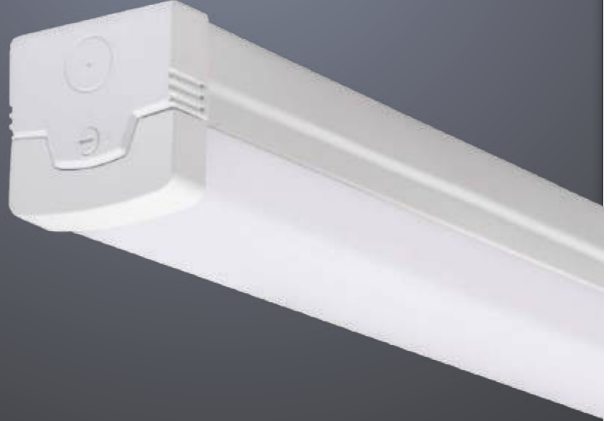

BOXY

BATTEN



**FLICKER
FREE**



**EASY LOCK
SYSTEM**



**>50,000hrs
LIFETIME**



**5 YEAR
WARRANTY**



Up to
**7,000LM
OUTPUT**



140LM/W



**CCT
SELECTABLE**


LIFETIME @L70 B10 >50,000hrs	DRIVER BRAND Lifud
LUMINAIRE EFFICACY 140lm/W	MAINS VOLTAGE AC200-240V/50-60Hz
CCT (SELECTABLE) 4000K/5000K/6000K	POWER FACTOR >0.95
CRI >80	THD <10%
SDCM <4	FLICKER Flicker free (PstLM <1/SVM <0.4)
BEAM ANGLE 120°	IP RATING IP20
	IK RATING IK08

PRODUCT VARIANTS

*Lumen output at 4000K CCT

WATTAGES	LUMEN OUTPUT*
50W	7,000lm
DIMENSIONS	1503mm x 66mm x 64mm
BOXY1500-50-8456	

WATTAGES	LUMEN OUTPUT*
40W	5,600lm
DIMENSIONS	1203mm x 66mm x 64mm
BOXY1200-40-8456	

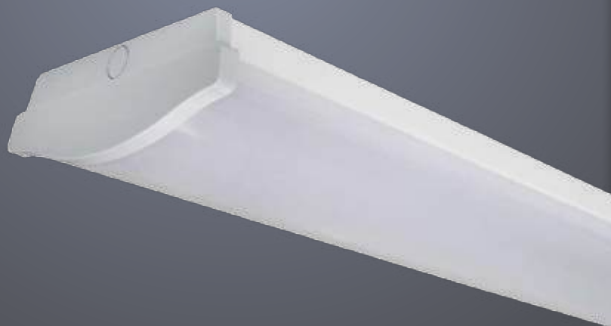

GRADUATE

WIDE BATTEN



**TRIDONIC
DRIVER**



120LM/W



Up to
**9,400LM
OUTPUT**



WATTAGE
Selectable



**EMERGENCY
OPTION**



**FLICKER
FREE**



>100,000hrs
Lifetime



**5 YEAR
WARRANTY**

LIFETIME @L70 B10 >100,000hrs	DRIVER BRAND Tridonic
LUMINAIRE EFFICACY 120lm/W	MAINS VOLTAGE AC220-240V/50-60Hz
CCT (SELECTABLE) 3000K/4000K/6000K	POWER FACTOR >0.95
CRI >80	THD <10%
SDCM <3 (4000K) <4 (3000K/6000K)	FLICKER Flicker free (PstLM <1/SVM <0.4)
UGR <22	IP RATING IP20
BEAM ANGLE 120°	IK RATING IK06

PRODUCT VARIANTS

WATTAGES	LUMEN OUTPUT	WATTAGES	LUMEN OUTPUT
32W	4,100lm	32W(set)	4,100lm
40W(set)	5,100lm	40W	5,100lm
48W	6,000lm	48W(set)	6,000lm
56W	7,000lm	60W	7,500lm
DIMENSIONS	1161mm x 212mm x 72mm	DIMENSIONS	1490mm x 212mm x 72mm
GRAD4FT-40-8346		GRAD5FT-60-8346	

CONFIGURATIONS

TYPE	SUFFIX CODE
DALI-2/ SwitchDim	-DIM
Triac Dimming	-PC
Emergency	-EM



TYPHOON

IP66 BATTEN



WATTAGE

Selectable



Up to
**8,000LM
OUTPUT**

PRE-THREADED CABLE ENTRY



TRIDONIC DRIVER



140LM/W



FLICKER FREE



CCT

Selectable



EMERGENCY OPTION



>50,000hrs

Lifetime



**5 YEAR
WARRANTY**

LIFETIME @L70 B10 >50,000hrs

LUMINAIRE EFFICACY 140lm/W

CCT (SELECTABLE) 3000K/4000K/5000K

CRI >80

SDCM <4

BEAM ANGLE 120°

DRIVER BRAND Tridonic

MAINS VOLTAGE AC220-240V/50-60Hz

POWER FACTOR >0.95

THD <10%

FLICKER Flicker free (PstLM <1/SVM <0.4)

IP RATING IP66

IK RATING IK08

PRODUCT VARIANTS

*Lumen output at 4000K CCT

WATTAGES

LUMEN OUTPUT*

32W	4,632lm
39W	5,598lm
47W (Set)	6,652lm
56W	8,000lm

DIMENSIONS

1540mm x 100mm x 84mm

TYP1500-56-8346

WATTAGES

LUMEN OUTPUT*

22W	3,034lm
28W	4,090lm
34W (Set)	4,590lm
40W	5,659lm

DIMENSIONS

1240mm x 100mm x 84mm

TYP1200-40-8346

WATTAGES

LUMEN OUTPUT*

11W	1,439lm
14W	1,949lm
16W (Set)	2,328lm
20W	2,800lm

DIMENSIONS

640mm x 100mm x 84mm


TYP600-20-8346

CONFIGURATIONS

TYPE

SUFFIX CODE

DALI-2	-DA
SwitchDim	-SD
Casambi Wireless	-CA
Emergency	-EM

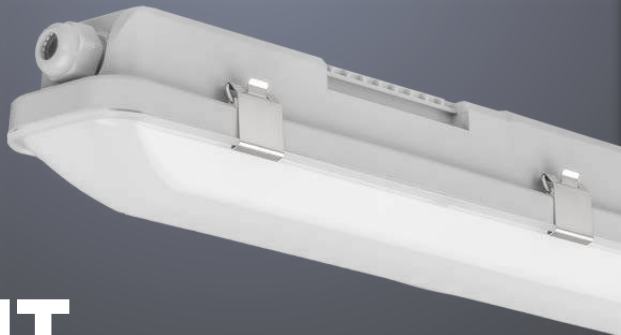

TRIDENT

IP66 BATTEN



**FLICKER
FREE**



130LM/W



>50,000hrs
Lifetime



**5 YEAR
WARRANTY**

**PRE-THREADED
CABLE ENTRY**



Up to
**6,500LM
OUTPUT**

LIFETIME @L70 B10 >50,000hrs	MAINS VOLTAGE AC220-240V/50-60Hz
LUMINAIRE EFFICACY 130lm/W	POWER FACTOR >0.95
CCT 4000K	THD <10%
CRI >80	FLICKER Flicker free (PstLM <1/SVM <0.4)
SDCM <4	IP RATING IP66
BEAM ANGLE 127°	IK RATING IK08

PRODUCT VARIANTS

WATTAGES	LUMEN OUTPUT
50W	6,500lm
DIMENSIONS	1465mm x 75mm x 80.6mm
TRI1500-50-840	



ASTRO 2.0

HIGHBAY



>100,000hrs
Lifetime



5 YEAR
WARRANTY



IP65



WATTAGE
Selectable



**QUICK
CONNECT
SENSOR READY**



**1-10V
DIMMING**



160LM/W



Up to
**32,000LM
OUTPUT**



CCT
Selectable



**EMERGENCY
OPTION**

LIFETIME @L70 B10 >100,000hrs

LUMINAIRE EFFICACY 160lm/W

CCT (SELECTABLE) 4000K/5000K/6000K

CRI >80

SDCM <5

BEAM ANGLE 90°

POWER OPTIONS 100W/150W/200W

MAINS VOLTAGE AC120-277V 50/60Hz

POWER FACTOR >0.98

THD <5%

IP RATING IP65

IK RATING IK08

CONNECTION 2m 3-core cable with 3-pin plug

PRODUCT VARIANTS

WATTAGES

100W

150W

200W (Set)

LUMEN OUTPUT*

16,000lm

24,000lm

32,000lm

DIMENSIONS

Ø310mm x 165mm

ASTRO.2-200-8456-90

CONFIGURATIONS

TYPE

DALI-2

Emergency

SUFFIX CODE

-DA

-EM

SENSOR OPTIONS

PIR Sensor & Daylight
Harvesting

HD06VCRH 7C-2

Microwave Sensor

HD06VCRH 7B

Casambi Microwave Sensor

MC079D 99 ZB1

*Lumen output at 4000K CCT

ACCESSORIES

SURFACE MOUNTING KIT


ASTRO.2-SMKIT



POLYCARBONATE REFLECTOR 90D

ASTRO.2-PCSKIRT



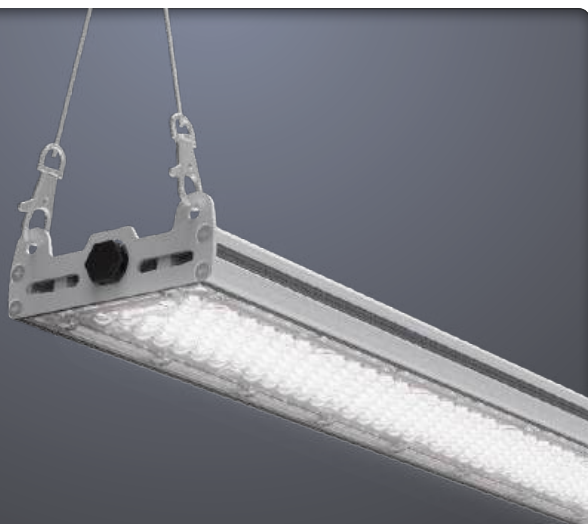

SLATE

LINEAR HIGHBAY

ONE FOR ONE

T5 highbay replacement



54% ENERGY SAVINGS

Over T5 highbay equivalent



5 YEAR

Warranty




Output up to

26,000LM

OPTICS

For warehouse aisles
and open areas

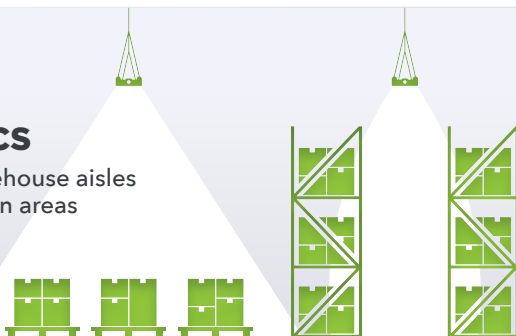

WATTAGE

Selectable
65W–150W



180LM/W



SENSOR

And control options



>60,000hrs

Lifetime



UGR 25

LIFETIME @L70 B10 >60,000hrs	MAINS VOLTAGE 200-277VAC / 50-60 Hz
LUMINAIRE EFFICACY 180lm/W	POWER FACTOR 0.99
CCT 4000K	DRIVER EFFICIENCY 95%
CRI >80	THD 5%
UGR <25	SURGE PROTECTION L-N:2KV,L-FG/N-FG:2KV
SUSPENSION KIT 3m adjustable 304 stainless steel	FLICKER Flicker free (PstLM <1, SVM <0.4)
DIMMING 1-10V	CONNECTION 3m Flex and plug
	IP RATING IP20
	IK RATING IK08

PRODUCT VARIANTS

WATTAGES	LUMEN OUTPUT	WATTAGES	LUMEN OUTPUT
65W	11,700lm	65W	11,700lm
80W	14,400lm	80W	14,400lm
100W	18,000lm	100W	18,000lm
120W	21,800lm	120W	21,800lm
150W	26,000lm	150W	26,000lm
DIMENSIONS	1000mm x 110mm x 60mm	DIMENSIONS	1000mm x 110mm x 60mm
BEAM ANGLE	90° (Open Area)	BEAM ANGLE	30x100° (Aisle)
SLATE-150-840-G-90		SLATE-150-840-G-AD	

CONFIGURATIONS

TYPE	SUFFIX CODE	TYPE	SUFFIX CODE
DALI-2	-DA	Motion Sensor	-SNR
pushDim	-SD	Daylight Sensor	-DS
Casambi Wireless	-CA		



STRIX

FLOODLIGHT SERIES

**ASYMMETRIC
DISTRIBUTION**



**5 YEAR
WARRANTY**



**C4
RATED**



WATTAGE
Selectable



**DAYLIGHT
SENSOR**

200W and
100W only



**PIR SENSOR
ACCESSORY**



170LM/W



CCT
Selectable



**LOOP IN
LOOP OUT**

LIFETIME @L70 B10 >100,000hrs	MAINS VOLTAGE 120-277VAC / 50-60 Hz
LUMINAIRE EFFICACY 170lm/W at 4000K	POWER FACTOR >0.95
CCT 3000K/4000K/5000K	CORROSION RATING C4 coastal (>200m from ocean)
CRI >80	BRACKET MATERIAL 316 Stainless Steel
BEAM ANGLE 60° x 90° (Tilt 30°)	IP RATING IP66
COATING Dual-layer surface protection with electrophoretic e-coating and polyester powder coating	IK RATING IK08
	SURGE PROTECTION CM: 6kV, DM: 6kV
	DRIVER LIFETIME 100,000hrs

PRODUCT VARIANTS



WATTAGES	LUMEN OUTPUT*
200W	34,000lm
160W	27,000lm
120W	20,400lm

STRIX-200-8345-B-AF



WATTAGES	LUMEN OUTPUT*
100W	17,000lm
80W	13,600lm
60W	10,200lm

STRIX-100-8345-B-AF



WATTAGES	LUMEN OUTPUT*
50W	8,000lm
30W	4,800lm
20W	3,200lm

STRIX-50-8345-B-AF

*Lumen output at 4000K CCT

ACCESSORIES

PIR SENSOR (50W ONLY) STRIX-SNR
SIGN ARM (1M) STRIX-SA-1000-B



CADET

FLOODLIGHT



**5 YEAR
WARRANTY**



CCT
Selectable



180LM/W



>102,000hrs
Lifetime

**MOUNTING
ACCESSORIES**

Available



WATTAGE
Selectable



1000hrs
Salt spray
resistance



Up to
**38,000LM
OUTPUT**

**ASYMMETRIC
DISTRIBUTION**



50 — 200W
4 sizes available

LIFETIME @L70 B10 >102,000hrs	MAINS VOLTAGE 100-277VAC / 50-60 Hz
LUMINAIRE EFFICACY 180lm/W (at 4000K)	POWER FACTOR 0.97
CCT (SELECTABLE) 3000K/4000K/5000K	SURGE PROTECTION CM: 6kV, DM: 6kV
CRI >70	IP RATING IP66
BEAM ANGLE 90° x 60° (Tilt 30°)	IK RATING IK08
SALT SPRAY RATING 1000hrs	

PRODUCT VARIANTS

*Lumen output at 4000K CCT

	
SELECTABLE WATTAGES	LUMEN OUTPUT*
30W	5,310lm
40W	7,000lm
50W (Set)	9,000lm
CAD-50-7345-G-AW	

	
SELECTABLE WATTAGES	LUMEN OUTPUT*
60W	11,390lm
75W	13,716lm
90W (Set)	17,000lm
CAD-60-7345-G-AW	

	
SELECTABLE WATTAGES	LUMEN OUTPUT*
90W	15,756lm
110W	19,756lm
130W (Set)	23,275lm
CAD-90-7345-G-AW	

	
SELECTABLE WATTAGES	LUMEN OUTPUT*
120W	21,708lm
160W (Set)	29,163lm
200W	38,000lm
CAD-200-7345-G-AW	

MOUNTING ADAPTORS

POLE TOP ADAPTOR
CAD-PT-G

- Adaptor size Ø60mm
- Electroplated Steel powder coated in grey




POLE ADAPTOR
CAD-PA-G

- Includes 2X M12*180mm hexagon screws and nuts
- Suitable for D48-60mm pole
- Electroplated Steel powder coated in grey



WALL CORNER ADAPTOR
CAD-CM-G

- Includes 6X M10*50mm expansion screws/anchoring
- Electroplated Steel powder coated in grey





SENTINEL

TWIN SPOT



**MOTION
SENSOR**

Option



CRI80



**DOUBLE
INSULATED**

Option



CCT

Selectable



**>50,000hrs
LIFETIME**



100LM/W



IP65



3/5 YEAR WARRANTY

WATTAGE 20W (2x10W)	MAINS VOLTAGE 200-240VAC / 50-60Hz
LIFETIME @L70 B50 >50,000hrs	POWER FACTOR >0.9
LUMINAIRE EFFICACY 100lm/W	SENSOR RANGE 12m
CCT 3000K/4000K/5000K	IP RATING IP65
CRI >80	IK RATING IK04
BEAM ANGLE 110°	WARRANTY 3 year with Sensor, 5 year No Sensor

PRODUCT VARIANTS

DOUBLE INSULATED WITH SENSOR



WHITE: SENTNL-20-8345-W-P-S
BLACK: SENTNL-20-8345-B-P-S

DOUBLE INSULATED NO SENSOR



WHITE: SENTNL-20-8345-W-P
BLACK: SENTNL-20-8345-B-P

WITH SENSOR



WHITE: SENTNL-20-8345-W-M-S
BLACK: SENTNL-20-8345-B-M-S

NO SENSOR



WHITE: SENTNL-20-8345-W-M
BLACK: SENTNL-20-8345-B-M



WALL PACK

LED WALL LIGHT



**CCT
SELECTABLE**



**>50,000hrs
LIFETIME**



**DOUBLE
INSULATED**



IP65



5 YEAR WARRANTY



**2,891LM
OUTPUT**



IK08




100LM/W

LIFETIME @L70 B10 >50,000hrs	POWER 30W
LUMINAIRE EFFICACY 100lm/W	MAINS VOLTAGE AC220-240V/50-60Hz
CCT 3000K/4000K/5000K	POWER FACTOR >0.95
CRI >80	THD <10%
SDCM <5	IP RATING IP65
MATERIAL Polycarbonate	IK RATING IK08
PROTECTION CLASS Class II	

PRODUCT VARIANTS

WATTAGES	LUMEN OUTPUT
30W	2,891lm
TYPE	Standard
DIMENSIONS	310.5mm x 264.9mm x 122mm

EVWP-30-8345

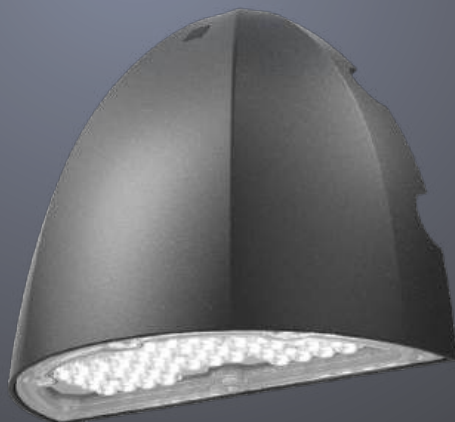

GUARD

PERIMETER LIGHT



135LM/W



Up to
**3,234LM
OUTPUT**

**DAYLIGHT
SENSOR**



IK10



CCT
Selectable



IP66

**DARK SKY
FRIENDLY**



**>60,000hrs
LIFETIME**



**5 YEAR
WARRANTY**


LIFETIME @L70 B10 >50,000hrs	CONTROL Photocell
LUMINAIRE EFFICACY 135lm/W	MAINS VOLTAGE AC220-240V/50-60Hz
CCT (SELECTABLE) 3000K/4000K/5000K	POWER FACTOR >0.90
CRI >80	THD <10%
SDCM <3	IP RATING IP66
UP LIGHT 0%	IK RATING IK10

PRODUCT VARIANTS

*Lumen output at 4000K CCT

WATTAGES	LUMEN OUTPUT*
25W	3,234lm
DIMENSIONS	212mm x 238mm x 138.5mm
GUARD-25-3CCT-B	

WATTAGES	LUMEN OUTPUT*
14W	1,874lm
DIMENSIONS	212mm x 238mm x 138.5mm
GUARD-14-3CCT-B	

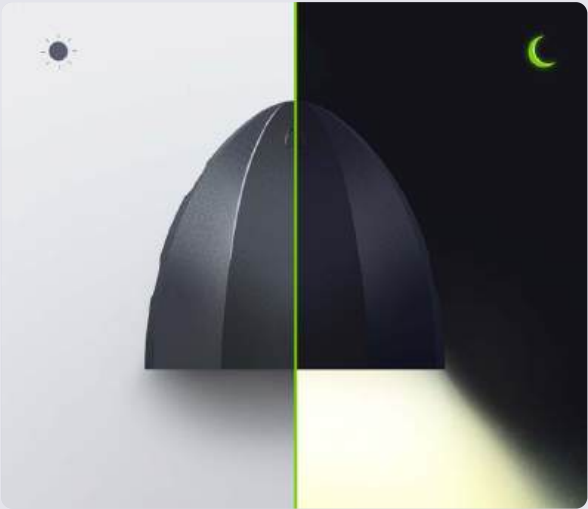

GREAT SPACES REQUIRE GREAT FOUNDATIONS.



EVOLVE
LIGHTING



0800 357 6311

evolve-lighting.co.nz

Lighting Council NEW ZEALAND™
MEMBER