




# SLATE

## LINEAR HIGHBAY

### ONE FOR ONE

T5 highbay replacement



### 54% ENERGY SAVINGS

Over T5 highbay equivalent



### 5 YEAR

Warranty



Output up to  
**26,000LM**

### OPTICS

For warehouse aisles  
and open areas



### WATTAGE

Selectable  
65W–150W



**180LM/W**



**>60,000hrs**  
Lifetime




### SENSOR

And control options



**UGR 25**

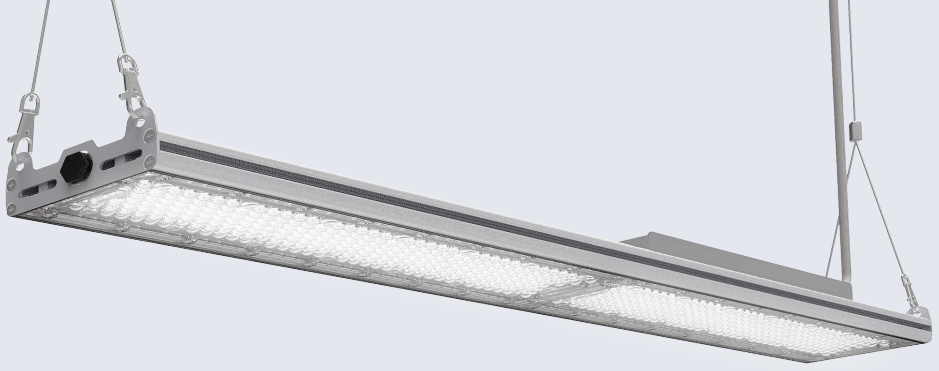

## TECHNICAL DATA

**LIFETIME @L70 B10** >60,000hrs

**LUMINAIRE EFFICACY** 180lm/W

**CCT** 4000K

**CRI** <70

**UGR** <25

**BEAM ANGLES**

90° (Open Area) & 30x100° (Aisle)

**SUSPENSION KIT**

3m adjustable 304 stainless steel

**CONNECTION** 3m Flex and plug

**MAINS VOLTAGE** 200-277VAC / 50-60 Hz

**POWER FACTOR** 0.99

**DRIVER EFFICIENCY** 95%

**THD** 5%


**SURGE PROTECTION** L-N:2KV,L-FG/N-FG:2KV

**FLICKER** Flicker free (Pst LM <1, SVM <0.4)

**DIMMING** 1-10V

**IP RATING** IP66

**IK RATING** IK08

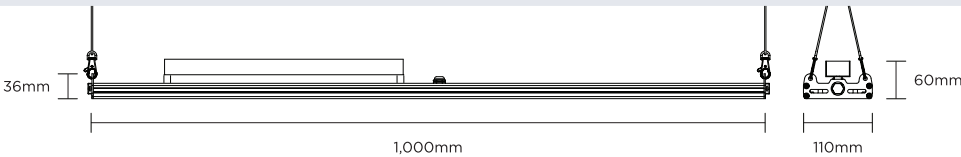

## WATTAGES/OUTPUTS

**WATTAGES**

65W

80W

100W

120W

150W

**LUMEN OUTPUT**

11,700lm

14,400lm

18,000lm

21,800lm

26,000lm

## CONTROL OPTIONS

**TYPE**

DALI-2

pushDim

Casambi Wireless

Motion Sensor

Daylight Sensor

**SUFFIX CODE**

-DA

-SD

-CA

-SNR

-DS