

GDL302SM/RC

UNITRCK III


RECESSED / SURFACE MOUNTED ADJUSTABLE SPOTLIGHT




FEATURES

- Die-cast aluminium body
- Powder coated finish in white or black
- PC reflector combined with a PMMA lens for smooth and uniform light distribution
- Featuring vertical adjustment of up to 80° and horizontal rotation of 320°
- Triac dim LED driver included (not coverable)
- IC-F for the recessed version
- Colour matching 3 MacAdam steps
- LED lifespan: 50000 hours @ L80 B10, Ta 25°C
- Ta:-20°Cto +40°C

DIMENSIONS

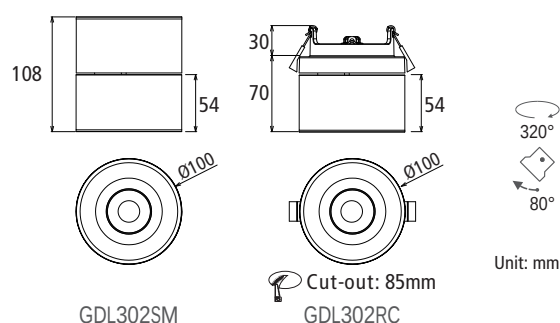


COLOUR SELECTABLE

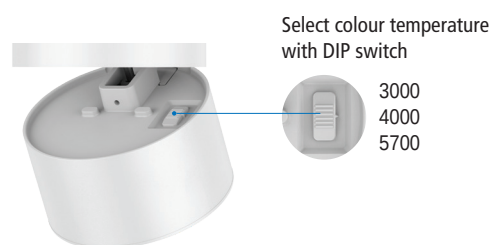

OPTION

- BEAM ANGLE: 20°

PHOTOMETRICS



TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	OUTPUT CURRENT (mA)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	R9	BEAM ANGLE (°)	FITTING COLOUR	CARTON QUANTITY
GDL302SM TC WH	230	10	250	950/1080/1020	3000/4000/5700	>90	6	36	White	24
GDL302SM TC BK									Black	
GDL302RC TC WH									White	
GDL302RC TC BK									Black	