

GDL915

NEPTUNE


ULTRA SLIM LOWGLARE SPOTLIGHT




FEATURES

- Plastic coated aluminum body
- PC prismatic lens to reduce glare
- High efficiency LED chips
- Triac dim LED driver included (not coverable)
- Power factor: 0.9
- Select colour temperature with DIP switch
- Colour matching 3 MacAdam steps
- LED lifespan: 50000 hours @ L70 B10, Ta 25°C
- Ta: -20°C to +40°C


IMAGES

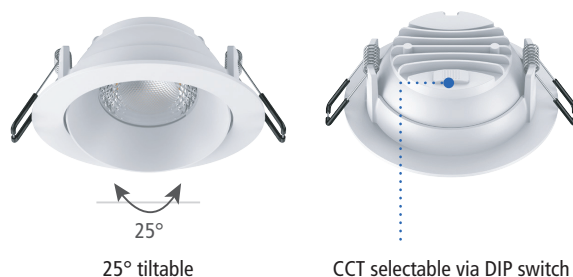

DIMENSIONS

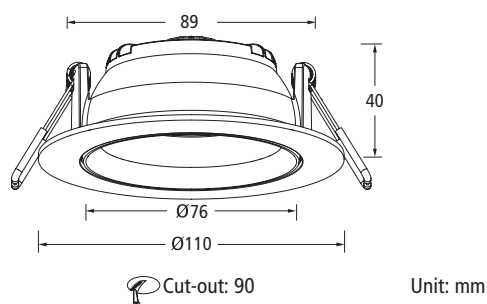

PHOTOMETRICS

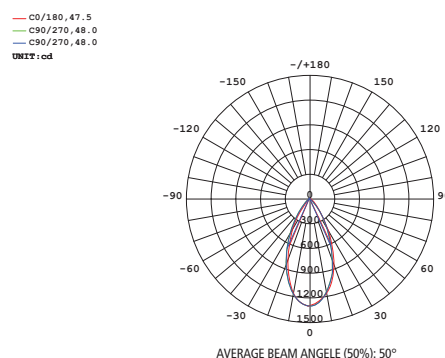

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	OUTPUT CURRENT (mA)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	FITTING COLOUR	CARTON QUANTITY
GDL915 TC WH	230	8	180	800/860/840	2700/3000/4000	>90	50	White	36

Specifications above are for reference only and may vary without prior notice