


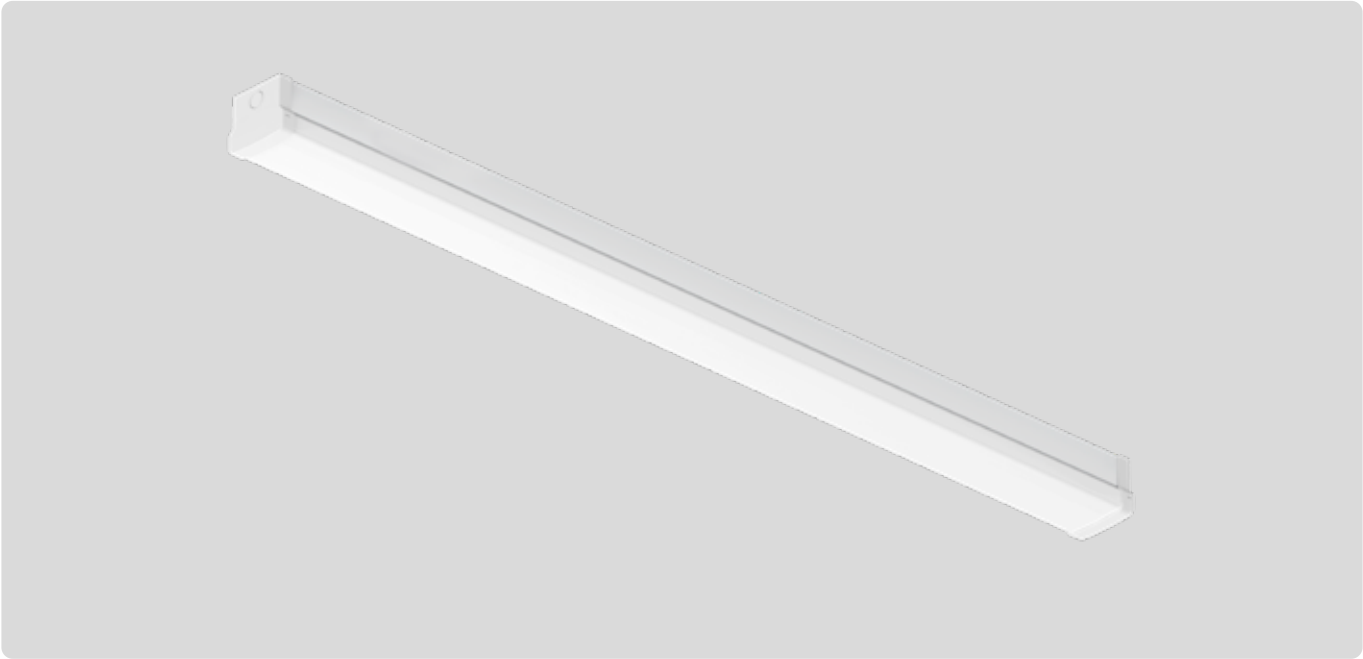

LED440	615mm
Watts 20W	
Lumens 2200lm	

LED441	1221mm
Watts <43W	
Lumens <4880lm	

LED442	1523mm
Watts <63W	
Lumens <6960lm	

Specifications

Input	240V AC
Dimensions	W84 x H70mm. LED440: L615mm, LED441: L1221mm, LED442: 1523mm
Colour Temp	LED440: Selectable 4000K or 6000K LED441 LED442: Selectable 4000K or 5700K
CRI	80
Lifespan	54,000hrs (L70 B10)
Material	SPCC (Steel), PC Plastic
Beam	120°
IP Rating	IP20
IK Rating	IK08 (Emergency IK05)
Termination	Central rear termination as standard, knockouts at both ends for alternative installation methods
Driver	Incorporated, Standard, XL Terminals
Dimming/Control	Non-dimmable, Phase-cut Dimmable
TLAs	"Flicker-free", PstLM ≤ 1.0 ; SVM ≤ 0.4
Electrical Class	Class I luminaire, requires earth
Application	Interior
Inrush	LED440 W46: 15A @ 300 μ s, LED441-W457KA: 25A @ 200 μ s LED442-W457KA: 35A @ 200 μ s
Drivers per MCB	LED440 W46: B16=18 / C16=39, LED441-W457KA: B16=16 / C16=35 LED442-W457KA: B16=11 / C16=25
Power Factor	>0.9 (Dimmable >0.95)
Emergency	Classification C0 D50 / C90 D32, 2.7W 350lm, Lithium LiFePO4 3.3Ah 3.2V 180 min battery, AS/NZS 2293.3 compliant.
Warranty	5 Year Warranty. Emergency: 3 Year Warranty.



White

Available In

Description	Code
LED440 - 615mm	
White, Fixed Output (Non-dim)	LED440 W46
LED441 - 1221mm	
White, Adjustable Output (Non-dim)	LED441-W457KA
White, Phase-cut Dimmable	LED441-W457K-D
White, Emergency (Non-dim)	LED441-W457K-EM
LED442 - 1523mm	
White, Adjustable Output (Non-dim)	LED442-W457KA
White, Phase-cut Dimmable	LED442-W457K-D
White, Emergency (Non-dim)	LED442-W457KA-EM

Watts/Lumens	**Default factory setting		
Version	LED440	LED441	LED442
Standard (Non-Dim)	20W / 220lm	22W / 2970lm	31W / 4185lm
		28W / 3695lm	38W / 4940lm
		34W / 4280lm	48W / 6000lm
		40W / 4880lm**	58W / 6960lm**
Phase-cut Dim		40W / 4850lm	44W / 5400lm
Emergency		43W / 4850lm	47W / 5640lm
			53W / 6100lm
			58W / 6500lm
			63W / 6930lm**

Accessories

Description	Code
2m Adjustable Suspension Kit	LED443 CLS