


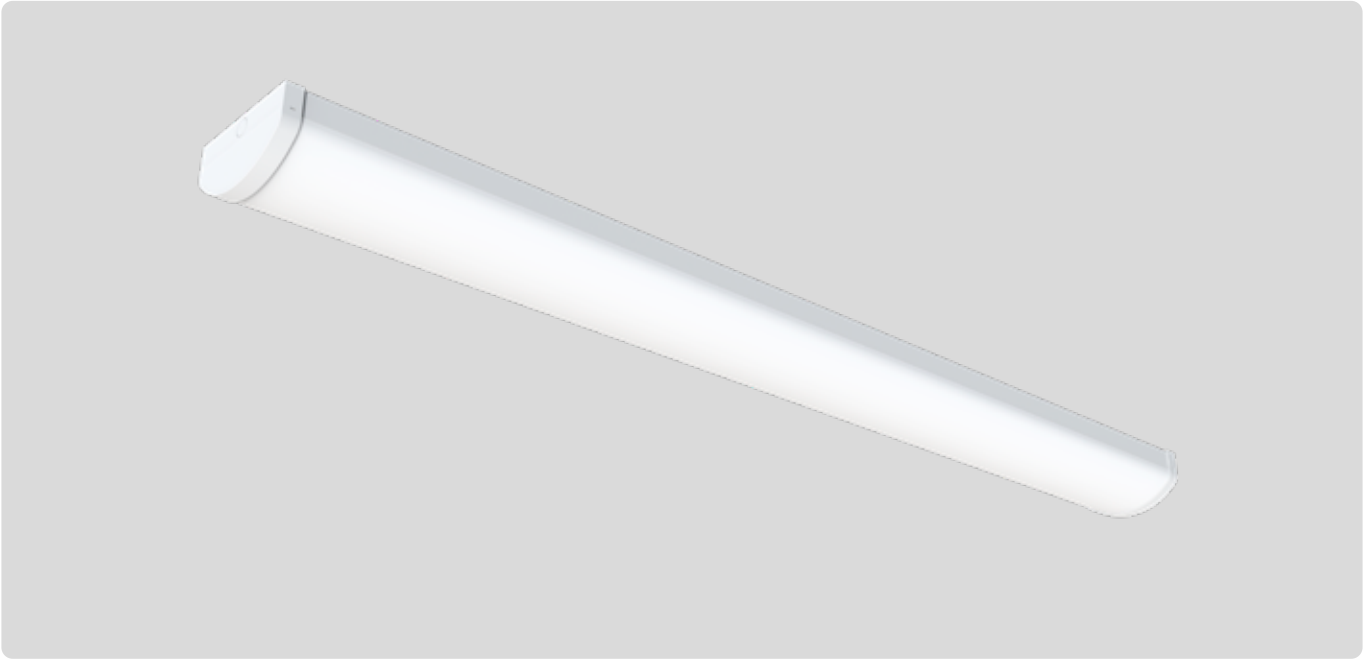

LED444 1200mm

Watts <58W

Lumens <6300lm

LED445 1500mm

Watts <76W

Lumens <8800lm

Specifications

Input	240V AC
Dimensions	W163 x H82mm. LED444: L1200mm, LED445: L1500mm
Colour Temp	Selectable 4000K or 5700K
CRI	90 (R9 >61)
Lifespan	72,000hrs (L80 B10)
Beam	120°
Binning	SDCM 3
Material	PC, SPCC
IP Rating	IP54
IK Rating	IK05
Termination	Central rear termination as standard, knockouts at both ends for alternative installation methods
Driver	Incorporated, Standard, XL Terminals
Dimming/Control	Adjustable Output Non-dimmable, Phase-cut Dimmable, Dali or Emergency
TLAs	"Flicker-free", PstLM ≤1.0; SVM ≤0.4
Electrical Class	Class I luminaire, requires earth
Application	Interior
Power Factor	0.90
Ambient Temp	-20..+40°C
Weight	LED444: <2650g, LED445: <3000g
Emergency	Classification C0 D80 / C90 D43, 4W 540lm, Lithium LiFePO4 4.8Ah 3.2V 90 min battery, AS/NZS 2293.3 compliant.
Warranty	5 Year Warranty. Emergency: 3 Year Warranty.

Watts/Lumens **Default factory setting

Version	LED444	LED445
Standard (Non-Dim)	29W / <3775lm	37W / <5000lm
	36W / <4565lm	50W / <6500lm
	42W / <5275lm**	56W / <7150lm**
	50W / <6125lm	70W / <8225lm
Phase-cut Dim	40W / <4100lm	40W / <4700lm
	45W / <4600lm	45W / <5200lm
	50W / <5100lm**	50W / <5500lm**
	54W / <5500lm	54W / <6000lm
Dali	50W / <6125lm	70W / <8225lm
Emergency	44W / <5000lm	56W / <6800lm
	50W / <5500lm**	65W / <7800lm**
	54W / <5850lm	69W / <8200lm
	58W / <6300lm	76W / <8800lm




White

Available In

Description	Code
LED444 - 1200mm	
White, Standard	LED444-W457KA
White, Phase-cut Dimmable	LED444-W457KA-D
White, Dali	LED444-W457K-DD
White, Emergency	LED444-W457KA-EM
LED445 - 1500mm	
White, Standard	LED445-W457KA
White, Phase-cut Dimmable	LED445-W457KA-D
White, Dali	LED445-W457K-DD
White, Emergency	LED445-W457KA-EM

Accessories

Description	Code
Adjustable Suspension Kit 2x (Y)	SUS-Y-BAT2
Ceiling Rose White	EV CRW



SUS-Y-BAT2



EV CRW